

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 September 2002 (19.09.2002)


PCT

(10) International Publication Number  
**WO 02/073061 A1**

- (51) International Patent Classification<sup>7</sup>: **F16D 65/12**, 65/36 (74) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box 4188, S-203 13 Malmö (SE).
- (21) International Application Number: **PCT/SE02/00451** (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: **13 March 2002 (13.03.2002)**
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0100841-6 13 March 2001 (13.03.2001) SE
- (71) Applicant (for all designated States except US): **HALDEX BRAKE PRODUCTS AB** [SE/SE]; Box 501, S-261 24 Landskrona (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SANDBERG, Stefan** [SE/SE]; Högskolan 421 1gh 49, S-234 33 Lomma (SE). **GRIPEMARK, Joakim** [SE/SE]; O.D. Krooks Gata 39, S-254 43 Helsingborg (SE).
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report

[Continued on next page]

(54) Title: **HALDEX BRAKE PRODUCTS AB**

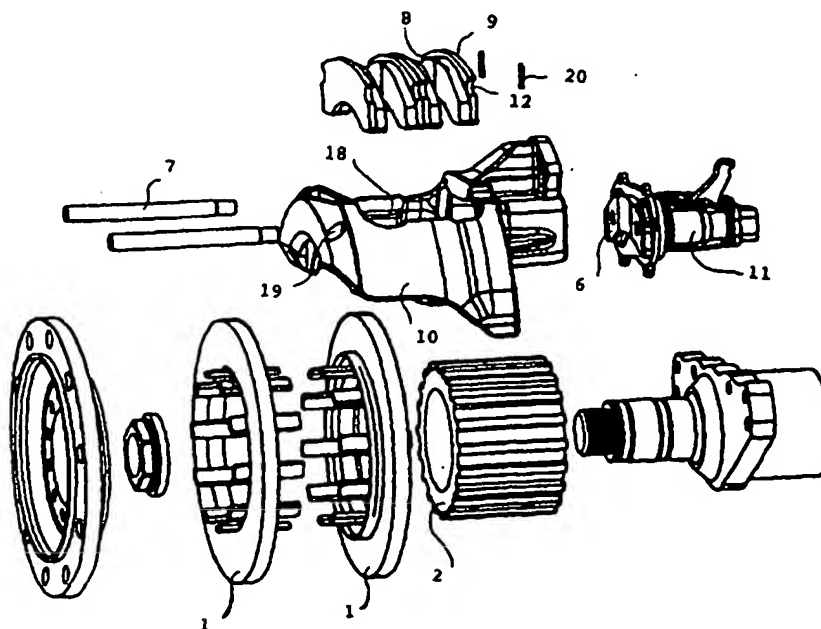

(57) Abstract: The present invention concerns a connection between at least one brake disc (1) and a hub (2) or the like of a disc brake. The brake disc(s) (1) is received slidable and non-rotatable on the hub (2). Each brake disc (1) is furnished with plates (3) on an inner periphery, which plates (3) have a length in the axial direction of the hub (2) exceeding the thickness of the brake disc (1).

WO 02/073061 A1

BEST AVAILABLE COPY

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 September 2002 (19.09.2002)


PCT

(10) International Publication Number  
**WO 02/073061 A1**

- (51) International Patent Classification<sup>7</sup>: **F16D 65/12**, (74) Agent: **STRÖM & GULLIKSSON IPC AB**; P.O. Box 4188, S-203 13 Malmö (SE).  
65/36
- (21) International Application Number: **PCT/SE02/00451** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 13 March 2002 (13.03.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0100841-6 13 March 2001 (13.03.2001) SE
- (71) Applicant (*for all designated States except US*): **HALDEX BRAKE PRODUCTS AB** [SE/SE]; Box 501, S-261 24 Landskrona (SE).
- (72) Inventors; and (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (75) Inventors/Applicants (*for US only*): **SANDBERG, Stefan** [SE/SE]; Höjeåtan 421 Igh 49, S-234 33 Lomma (SE). **GRIPEMARK, Joakim** [SE/SE]; O.D. Krooks Gata 39, S-254 43 Helsingborg (SE).
- Published:  
— with international search report

[Continued on next page]

(54) Title: **HALDEX BRAKE PRODUCTS AB**

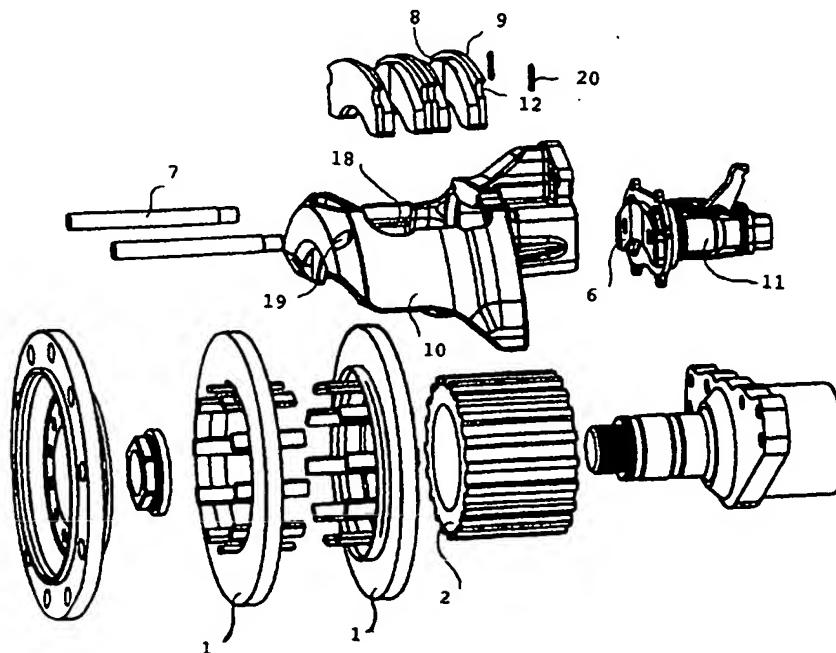

(57) Abstract: The present invention concerns a connection between at least one brake disc (1) and a hub (2) or the like of a disc brake. The brake disc(s) (1) is received slidable and non-rotatable on the hub (2). Each brake disc (1) is furnished with plates (3) on an inner periphery, which plates (3) have a length in the axial direction of the hub (2) exceeding the thickness of the brake disc (1).



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**HALDEX BRAKE PRODUCTS AB****COMPACT DISC SUPPORT**5        Technical Field

The present invention concerns a means for connecting one or more brake discs non-rotatable but slideable in relation to a hub or the like.

10       Prior Art

It is previously known to use splines to arrange e.g. one or more brake disc slidable but non-rotatable on a hub. Due to an often limited, available space the discs must be made relatively thin. The thin discs are susceptible to  
15 locking due to becoming skewed, i.e. the discs become inclined.

Summary of the Invention

The problem with locking due to skewed discs may be  
20 solved by making the discs rather thick. However, if the available space is limited it may not be possible to have discs that are thick enough. Thus, one object of the present invention is to save space and weight and yet avoid the above problems.

25 The above object is met by a connection between at least one brake disc and a hub or the like, which brake disc is received slidable and non-rotatable on the hub or the like. Each brake disc is furnished with plates on the inner periphery. The length of the plates in the axial di-  
30 rection of the hub or the like exceeds the thickness of the brake disc.

If the thin discs become inclined they will be locked if the friction against the surrounding parts is too big. It could be called a self-locking effect. This self-locking  
35 effect could be compared to a drawer becoming locked in the beginning of an inward movement. When the drawer has been

inserted beyond a certain point there is no risk of locking. Thus, the length of the plates of the brake disc should be long enough to avoid the risk of the self-locking as discussed above.

5       A second object of the present invention is to reduce the thermal stress, the risk for cracks and wear of the discs and thus reduce the frequency of replacement of them.

      A further object of the present invention is to eliminate or at least reduce the noise generation and wear of  
10 the connection between the hub and each disc.

      Further objects and advantages of the invention will be obvious for a person skilled in the art from reading the detailed description below of preferred embodiments of the invention.

15

#### Brief Description of the Drawings

      Fig. 1 is an exploded view of a disc brake comprising the invention.

      Fig. 2 is a perspective view of a hub and two brake  
20 discs according to the invention in a first position.

      Fig. 3 is a perspective view of the hub and brake discs of Fig. 2 in a second position.

      Fig. 4 shows one example on the form of the tooth gaps on the brake disc.

25

#### Detailed Description of Preferred Embodiments

      The present invention will be described in connection with a brake disc. Even though the disc brake is developed for heavy vehicles it may be used for any type of vehicle.

30       The discs 1 and the hub 2 of the disc brake of Fig. 1 are connected to each other by means of a kind of splines connection. The hub 2 has a number of tooth gaps 4 and teeth 5 on the outer periphery. The discs 1 have a number of plates 3 on their inner periphery. The plates 3 of the

discs 1 are to be received in the tooth gaps 4 of the hub 2.

The plates 3 of the discs 1 are normally an integrated part of the discs 1 formed together with the discs 1. In other embodiments (not shown) the plates are attached to the discs 1 by means of welding, soldering, gluing or the like.

The plates 3 of the discs 1 have a length in the axial direction of the hub 2, which length exceeds the thickness of the discs 1. Hereby, the discs 1 will have an improved support comparable to if the discs 1 had the same thickness as the length of the plates 3. Normally the length of the plates 3 is at least 50% and preferably at least 100% larger than the thickness of each brake disc 1.

The length should preferably be long enough to avoid a self-locking effect as indicated above. The exact length to be exceeded depends mainly on the friction of the plates and surrounding material, the play between the plates and surrounding material.

In this description the expressions "axial" and "radial" and similar expressions are in reference to the axis of the hub.

Each plate 3 is normally placed unsymmetrical on the disc 1, i.e. the plate 3 extend at different lengths from the opposite sides of the disc 1. This is done to make use of the limited available space. In other embodiments (not shown) the plates 3 will only extend from one side of the disc 1. Furthermore, the length of the plates 3 may vary on the same side of the disc 1. Thus, it is possible to alternate with long and short plates 3 on both sides of the same brake disc 1.

In Fig. 2 the discs 1 a, b are shown schematically before assembly on the hub 2 and in Fig. 3 the discs 1 a, b are shown after assembly. In the shown embodiment the plates 3 of a first disc 1a is received in every second

tooth gap 4 of the hub 2. The plates 3 of a second disc 1b are received in every second tooth gap 4 of the hub 2, but not the same gaps 4 as the plates 3 of the first disc 1a. In this way the plates 3 of adjacent discs 1 a, b are  
5 placed overlapping in the axial direction of the hub 2. If three discs 1 are present the plates 3 may be placed in every third tooth gap 4 and so on. Put in other words the plates 3 are placed in every n:th tooth gap 4, where n is the number of discs 1 of the disc brake. It is also possible  
10 to still place the plates 3 in every second tooth gap 4 if the length of the plates 3 is such that there will be no interference, i.e. the plates 3 should not risk to collide when the brake pads are worn out.

A person skilled in the art realises that the plates  
15 3 may be arranged in any suitable pattern. It is possible to let a first disc 1 have two or more plates 3 in adjacent tooth gaps 4 followed by two or more plates from another disc 1 in the next adjacent tooth gaps 4 and so on. Thus, it is possible to mix longer and shorter plates 3 in any  
20 order between the different discs 1, as long as it does not impair the axial movement of the discs 1.

If the brake has three brake discs 1 the plates 3 of the disc 1 placed in the middle will normally be placed symmetrically, i.e. the plates 3 will extend the same  
25 length on both sides of the disc 1.

The circumferential length of the plates 3 of the brake disc 1 exceeds the circumferential length of the teeth 5 of the hub 2.

The geometry of the discs 1 at the inner periphery is  
30 adapted to reduce the possible thermal stressing. Also the geometry of the teeth 5 of the hub 2 are adapted to reduce possible thermal stressing. Thermal stressing may occur in the brake discs becoming hot at breaking.

A further consequence of the design with relatively  
35 thin discs 1 is that the weight will go down.

In the embodiment of Fig. 1 two brake discs 1 are received on a rotating hub 2. The brake discs 1 are carried axially moveable but non-rotatable in relation to the hub 2. The brake discs 1 and brake pads 8 are moved axially on the hub 2 by means of one or more thrust plates 6.

The brake pads 8 placed between the brake discs 1 are in one embodiment formed of a single support 9 having brake linings on both sides of the support 9.

In the upper part of a caliper 10 for the disc brake an opening 18 is provided. The brake pads 8 are inserted and removed via the opening 18 of the caliper 10. In the caliper 10 two guide pins 7 are arranged essentially perpendicular to the disc(s) 1 in longitudinal grooves 19. The guide pins 7 are removably attached to the caliper 10 by means of locking pins 20 or any other suitable fastening means.

When the brake pads 8 are to be replaced the locking pins 20 fixing the guide pins 7 to the caliper 10 are loosened. Then the guide pins 7 are drawn out of the grooves 19, whereby the brake pads 8 may be lifted out of the caliper 10. The new brake pads 8 are brought down through the opening 18 of the caliper 10. The guide pins 7 are then reinserted in the grooves 19, whereby the recesses 12 of the brake pads 8 are to be positioned to receive the guide pins 7. Finally, the guide pins 7 are fixed to the caliper 10 by means of the locking pins 20 or the like.

Thus, the brake pads 8 are arranged moveable in an axial direction on the guide pins 7.

As stated above the brake discs 1 are received on the hub 2. During motion of the vehicle the hub 2 will rotate. The connection between the hub 2 and the brake discs 1 has the form of a splines connection. The splines connection allows axial movement for the brake discs 1 but transfer the rotational movement of the hub 2 to the brake discs 1.



In order to reduce the heat transfer the inner periphery of the brake disc 1 may have a curve form as indicated in Fig. 4. The form of the inner periphery in Fig. 4 is only given as an example and a person skilled in the art  
5 realises that it may have many different forms. By the curve form the physical contact between the brake discs 1 and the hub 2 is reduced and, thus, the heat transfer is reduced.

In use the disc brake will in normal way be actuated  
10 by means of a brake mechanism 11 actuated by an actuator (not shown), preferably a pneumatic actuator. In other embodiments a hydraulic or electrically actuator is used. As the actuating mechanism forms no part of the present invention it will not be described further here. One example for  
15 an actuating mechanism 11 is indicated in Fig. 1.

When the brake is activated the brake mechanism 11 will move the thrust plate 6 or thrust plates in the direction towards the brake discs 1. In this movement the thrust plate 6 or plates will bring the brake pads 8 into contact  
20 with the brake discs 1. All the brake pads 8 and brake discs 2 will be moved by the thrust plate 6 or plates except possibly the last brake pad 8, i.e. the brake pad 8 furthest from the thrust plate 6 or plates. When the brake pads 8 and the brake discs 1 come into contact the rotation  
25 of the hub 2 will be slowed down or stopped in normal way. This will in turn reduce the speed of the vehicle or stop it. The tangential load on the brake pads 8 will be taken up by the guide pins 7 received in the caliper 10.

A person skilled in the art realises that the number  
30 of brake discs 1 may be varied without departing from the scope of the present invention as defined by the enclosed claims.

## CLAIMS

1. A connection between at least one brake disc (1) and a hub (2) or the like of a disc brake, which brake disc (1) is received slidable and non-rotatable on the hub (2),  
5 **characterized** in that the brake disc(s) (1) is furnished with plates (3) on an inner periphery, which plates (3) have a length in the axial direction of the hub (2) exceeding the thickness of the brake disc(s) (1).

2. A connection according to claim 1, **characterized**  
10 in that the length of the plates (3) is long enough to avoid the risk of self-locking.

3. The connection according to claim 1 or 2, **characterized** in that the length of the plates (3) is at least 50% and preferably at least 100% larger than the  
15 thickness of each disc (1).

4. The connection according to any of the previous claims, **characterized** in that the plates (3) are received in tooth gaps (4) on the hub (2) having an optional distribution.

20 5. The connection according to claim 4, **characterized** in that the plates (3) of one brake disc (1) are received in every n:th tooth gap (4) of the hub (2), where n is the number of brake discs (1) of the disc brake.

6. The connection according to claim 4, **characterized**  
25 in that the plates (3) of one brake disc (1) is received in every second tooth gap (4) of the hub (2).

7. The connection according to claim 4, **characterized** in that the plates (3) of one brake disc (1) is received in every tooth gap (4) of the hub (2).

30 8. The connection according to any of the previous claims, **characterized** in that the circumferential length of the plates (3) of the brake discs (1) exceeds the circumferential length of the teeth (5) of the hub (2).

9. The connection according to any of the previous  
35 claims, **characterized** in that the plates (3) of adjacent

discs (1) are not placed in the same tooth gaps (4) and that they overlap in the axial direction.

10. The connection according to any of the previous claims, **characterized** in that one disc (1) is connected to  
5 the hub (2).

11. The connection according to any of the previous claims, **characterized** in that two or more discs (1) are connected to the hub (2).

12. The connection according to any of the previous  
10 claims, **characterized** in that the inner periphery of each brake disc (1) is given a form to reduce the effect of thermal stress.

13. The connection according to any of the previous claims, **characterized** in that the plates (3) are arranged  
15 unsymmetrically on the discs (1), i.e. the plates (3) extend with different lengths on the sides of the disc (1), and/or that the plates (3) have different lengths on the same side of the disc (1).

14. The connection according to claim 13, **character-**  
20 **ized** in that the plates (3) only extend from one side of the brake disc (1).

15. The connection according to any of the previous claims, **characterized** in that the plates (3) are integrated parts of each disc (1), formed together with the  
25 disc (1).

16. The connection of any of the claims 1 to 14, **characterized** in that the plates (3) are attached to each disc (1) by means of welding, soldering, gluing or the like.

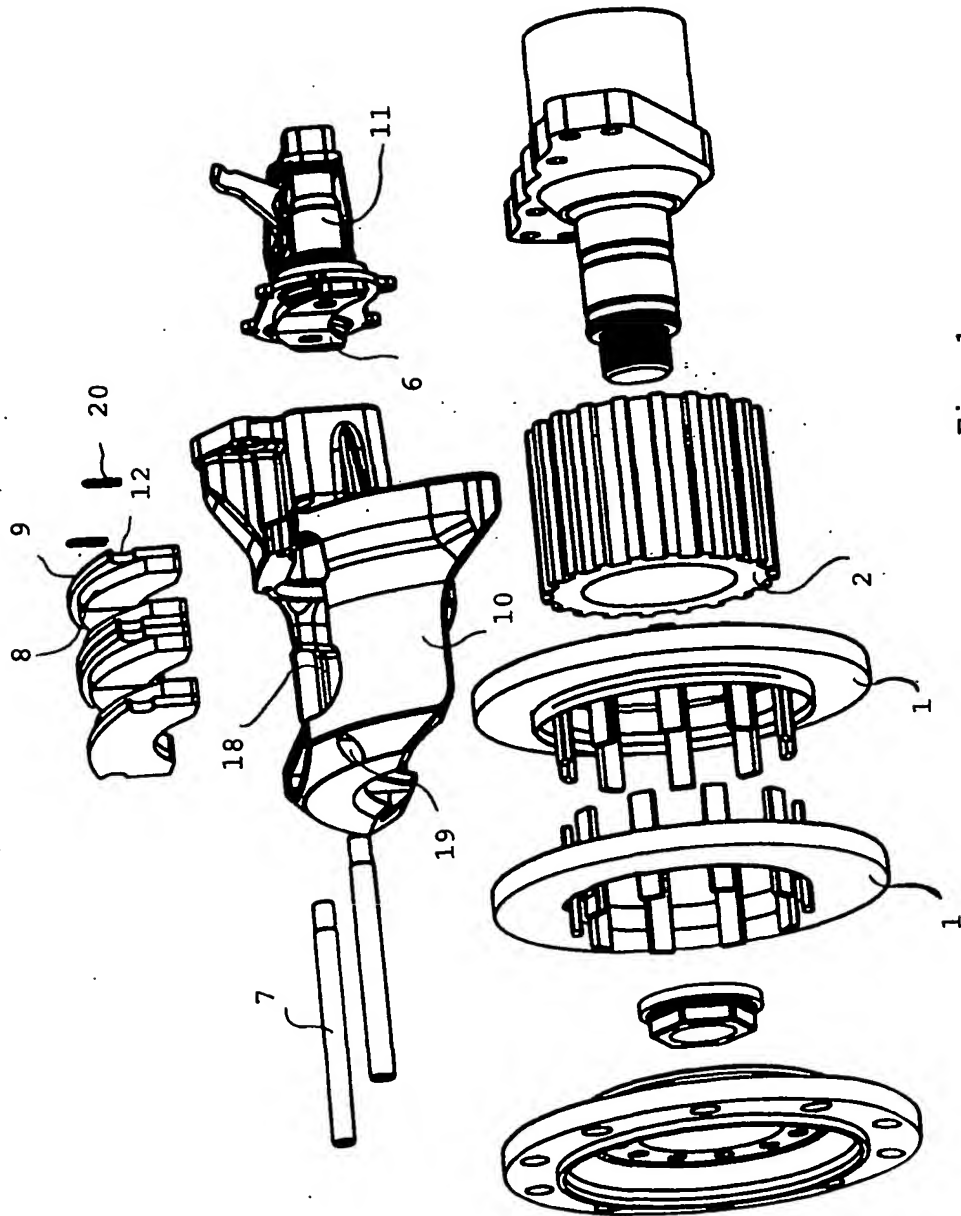


Fig. 1

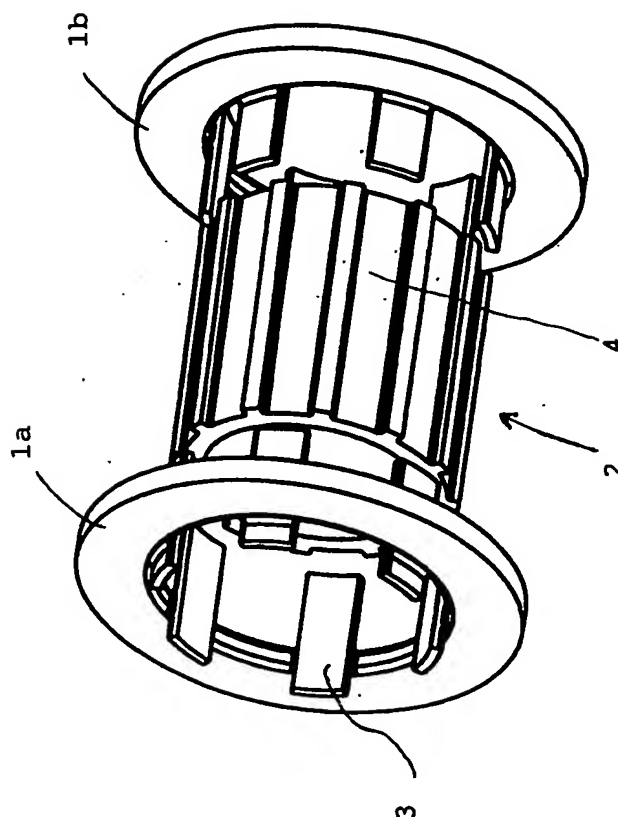


Fig. 2

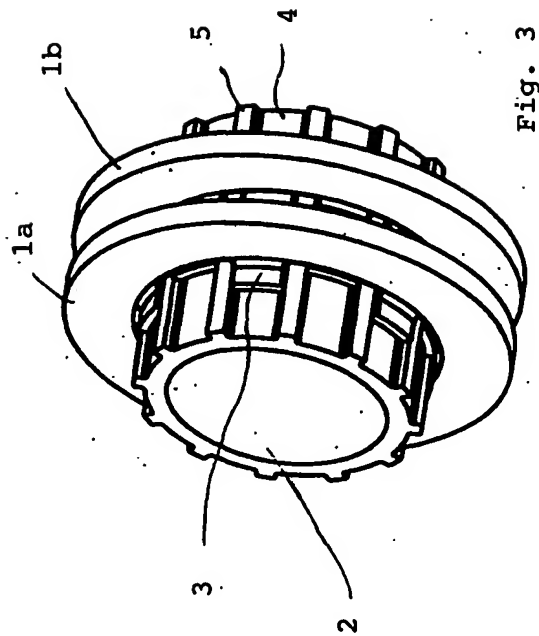


Fig. 3

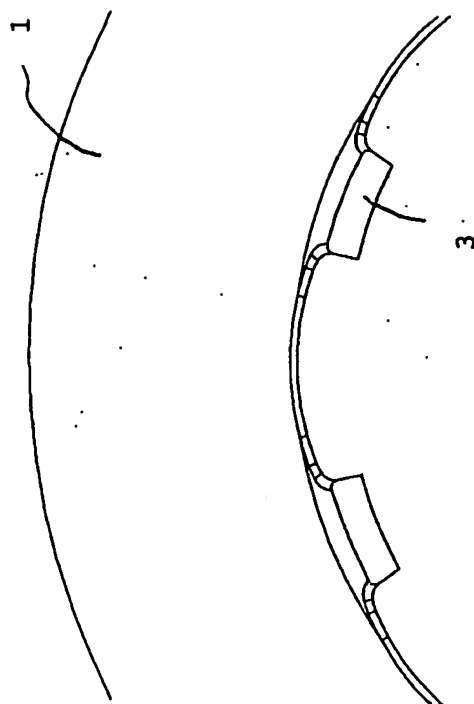


Fig. 4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 02/00451

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: F16D 65/12, F16D 55/36

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: F16D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5449052 A (MACKE ET AL.), 12 Sept 1995 (12.09.95), figure 4, abstract  --	1-16
A	US 3940159 A (PRINGLE), 24 February 1976 (24.02.76), figure 6, abstract  -- -----	1-16

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier application or patent but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

12 June 2002

Date of mailing of the international search report

24 -06- 2002

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 85

Authorized officer

Alexandra Jarlmark/SN

2/18/05, EAST Version: 2.0.1.4 +46 8 782 25 00



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

01/05/02

International application No.  
PCT/SE 02/00451

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5449052	A	12/09/95	DE	4323292 A	19/01/95
				EP	0635654 A,B	25/01/95
				SE	0635654 T3	
-----						
US	3940159	A	24/02/76	NONE		
-----						

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**